

# **RHJ600-V FIREMAN ALARM RECORDER**



The RHJ600 fireman's rescue device is small in size and sturdy in structure. It is a necessary emergency alarm equipment for personnel working in dangerous situations. It can realize functions such as distress calling and on-site alarm. Comply with GB27900-2011 "Firemen's SOS" standard. Its high-decibel alarm sound, bright orientation lights and strong alarm time of more than 10 hours ensure the safety of users at all times; it is suitable for workers in dangerous places such as fire fighting, emergency rescue, and mining operations.

## **FEATURES**

- *Comply With GB27900-2011 "Firemen's SOS" Standard*
- *Personal Information Black Box Function for Post Analysis*
- *Quick ID Key Switch*
- *Time Reminder*
- *High-decibel Audible Alarm and High-brightness Visual Alarm*
- *Motion Alarm*
- *Manual Alarm (SOS)*
- *High-temperature Alarm*
- *Built-in Wi-fi And Bluetooth 4.0/BLE Connectivity*
- *Automatic Real-time Video Recording and Photo Capture Capability*
- *Mobile APP Integration*



<http://www.eastgear-int.com>



[info@eastgear-int.com](mailto:info@eastgear-int.com)



@egearint



@East Gear

# RHJ600-V FIREMAN ALARM RECORDER




## SPECIFICATIONS

Type	Data
Size (W x H x D )	75 X 117 X 52mm (Without back clip)
Weight	≈270g (Start key not included)
Storage	64 GB (Over 10 hours of video)
Video Resolution	2K
Display	2.1-inch LCD
Luminance	≥300 cd/m <sup>2</sup>
Battery	7.4V 1200mAh rechargeable (Type-C)
Continuous Working Time	≥150h (Recording mode off)
Explosion-proof Grade	Ex ia IIC T3 Ga
IP Rating	IP68
Operating Voltage	7.4V
Operating Temperature	-25°C~+70°C
Relative Humidity	30%~95%

Type	Data
Allow Rest Time	30s±2s
Pre-alarm Time	15s±2s
Strong Alarm Time	≥600min
Low Voltage Alarm Sound Level Intensity	≥65dB
Pre-alarm Sound Level Intensity	≥90dB
Strong Alarm Sound Level Intensity	≥100dB

## VIDEO RECORDING

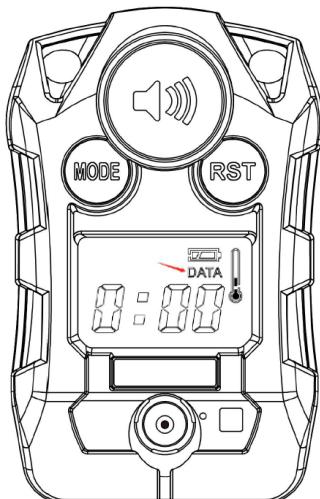

*Recording Performance  
Resolution: 1080p*

### Video Recording Operation

- Starts automatically ~10 seconds after power-on (DATA icon flashing)
- Ends automatically when the device is powered off
- Pause: Long-press [MODE] button for 2 seconds (DATA icon disappears)
- Resume: Long-press [MODE] button for 2 seconds (DATA icon flashing)
- Photo Capture: Short-press [MODE] button during recording

With the device powered on, simultaneously hold [MODE] and [RST] buttons.

- "OFF" displayed: Auto-record on startup is disabled.
- "ON" displayed: Auto-record on startup is enabled.



<http://www.eastgear-int.com>



[info@eastgear-int.com](mailto:info@eastgear-int.com)



@egearint



@East Gear